



Salient Value

- 32-bit ARM processor and 24-bit precision delta-sigma ADC
- Selectable filter and stability settings for any weighing application
- Automatic self-diagnostic function for easy troubleshooting
- Cloning the scale configuration and data for faster and reliable replacement
- Wide variety of configurable printing formats and reports
- Secure access control through passwords
- External scale/balance interface
- Windows 10-based PC application software
- Compatible ERP scale server
- User-friendly interactive menu

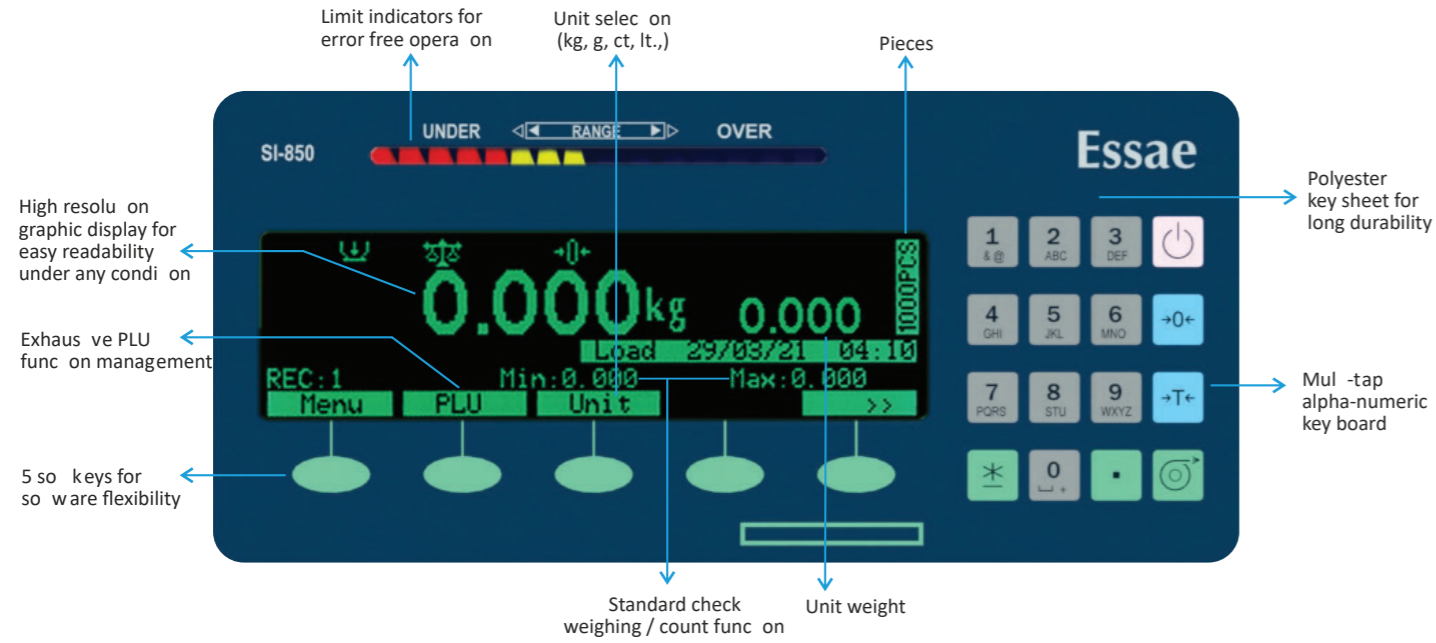

SI-850
Weighing System

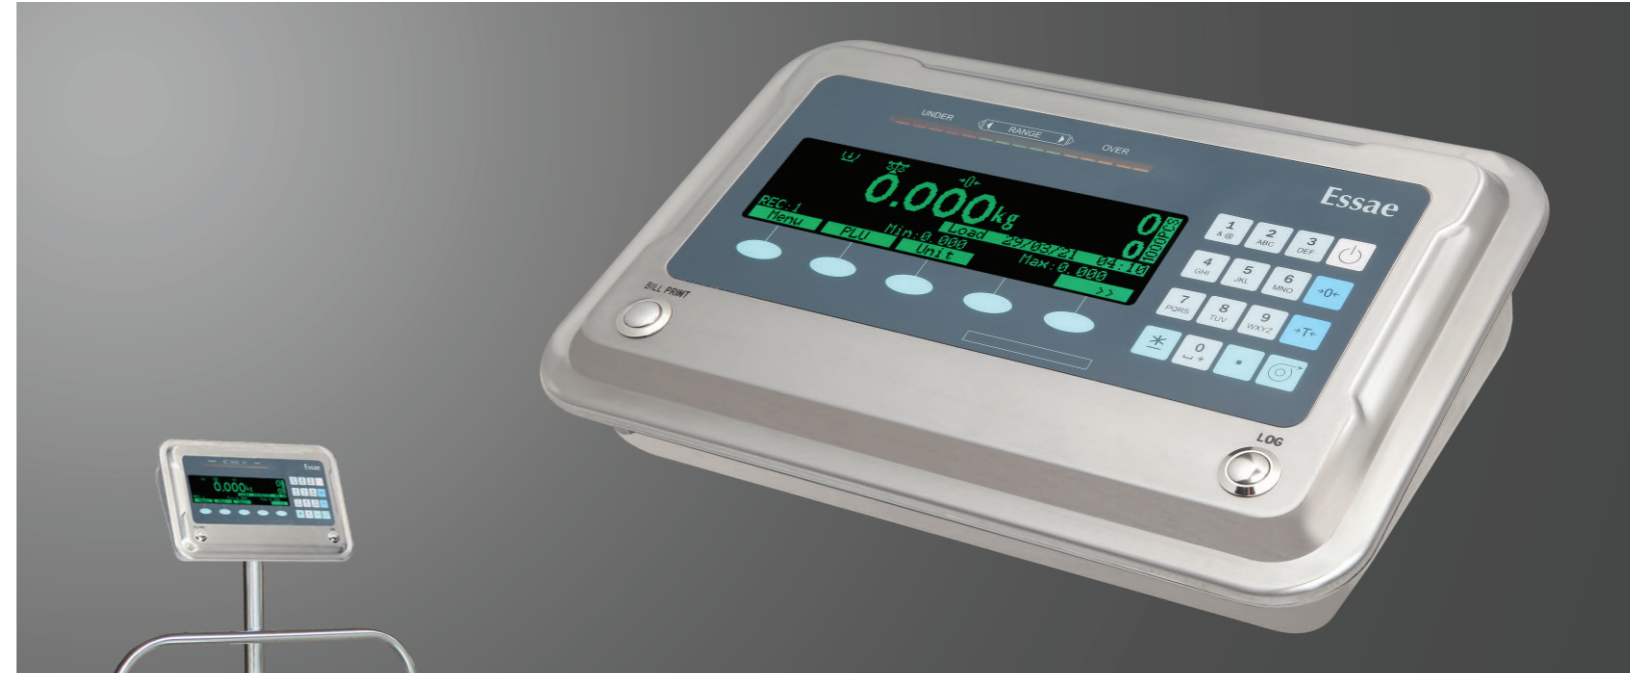

Form No.: 25537-CAT-SI-850-076 R05

Comprehensive System Solution for a wide range of Weighing needs

Authorized Partner...
Limra Instruments

G-8, Ground Floor Top Class Enclave CHS. Ltd.,
Opp Zudio Showroom, Bhoirpada, Sativali Road,
Vasai East, Dist. Palghar-401208, Maharashtra.


info@limrainstruments.com,
sales@limrainstruments.com,

www.limrainstruments.com

Customer Care - 7666114785



Your Limra Representative

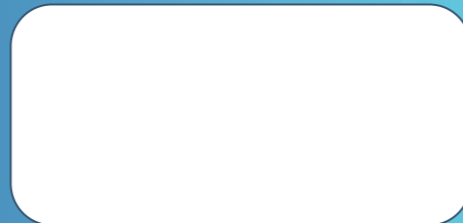

Technical Specification

Table top



Table Top

Capacity (kg)	Accuracy (g)	Platform size(mm)	Loadcell	Framework	Platter
1.5/3/6/15	0.1/0.2/0.5/1	205 x 250	Aluminum	SS-304	SS-304

Single loadcell bench scale

Capacity (kg)	Accuracy (g)	Platform size(mm)	Loadcell	Framework	Platter
3/6/15/30	0.2/0.5/1/2	360 x 280	Aluminum	SS-304	SS-304
6/15/30	0.5/1/2	360 x 280	Tool Steel-IP67		
6/15/30	0.5/1/2	400 x 400			SS-304

Single loadcell platform scale

Capacity (kg)	Accuracy (g)	Platform size (mm)	Loadcell	Framework	Platter
6/15/30	0.5/1/2	400 x 400	Aluminium	MS	SS
50/150	5/10	450 x 450	Tool steel-IP67		SS-304
150/300	10/20	550 x 650			SS
300	20	610 x 610			MSC
300	50	700 x 800			MS
300	20	700 x 800			SS/MS
300/600	20/50	700 x 800			

Capacity (kg)	Accuracy (g)	Platform size(mm)	Loadcell	Framework	Platter
50/60/100/150	5/5/10/10	450 x 550	Tool steel-IP67	SS-304	SS-304
100/150/300	10/10/20	550 x 650		SS-304	SS-304
300/600	20/50	700 x 800			

Four loadcell platform scale

Capacity (kg)	Accuracy (g)	Platform size (mm)	Loadcell	Framework	Platter
600	50	700 x 800	Tool steel-IP67	MS	MSC/SS-304*
600/1000/1500/2000/3000/5000	100/200/200/500/500/1000	1000 x 1200 / 1200 x 1200 / 1500 x 1500 / 1200 x 1500 / 1500 x 1800			SS-304
600/1000/1500	100/200/200	1000 x 1200 / 1200 x 1500		MS	Ms Cheq
1000/1500	200	2000 x 2000			
2000/3000	500				
5000	1000				

* SS-304 Platter is applicable only for 1000 x 1200 / 1200 x 1500 / 1500 x 1800

* Six Load cell Platform available both in Concentrated or Distributed load option

* Check technical spec doc for further info


Accessories

Ramp Size (mm)	Capacity (kg)	Ramp Size (mm)	Capacity (kg)
1200 x 1600 MSC	600 to 3000	1200 / 1500 / 1800 x 1870 MSC	1500 to 3000 (concentric)
1500 x 1600 MSC		1200 x 1600 SS-304	600 to 1500
1800 x 1600 MSC		1500 x 1600 SS-304	

Bench type



Platform type

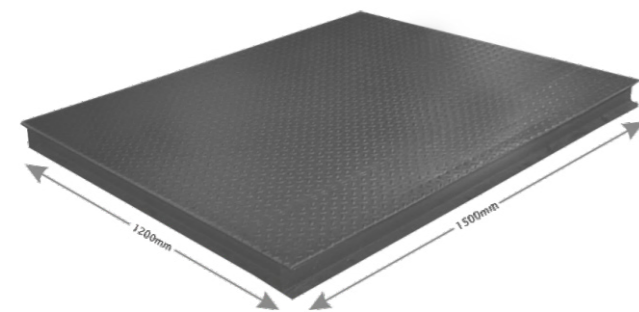

- Wide platform range to suit customer needs
- Rugged/Sturdy platforms in both SS/MS

Technical Specification

Low profile platform scale

- Fully Stainless Steel
- Ideal for Pharma and chemical industries
- Weighment area height is 45 mm ± 5 mm (600 x 600, 850 x 850)
Weighment area height is 60 mm ± 5 mm (1250 x 1250, 1500 x 1500)
- Ease of movement of Container / Trolley
- Size to suit customer applications

Accessories

Capacity (kg)	Accuracy (g)	Platform size (mm)	Ramp Size (mm)	Capacity (kg)
150/300/600	20/50/100	600 x 600	600 x 230	150 to 600
150/300/600	20/50/100	850 x 850	850 x 230	150 to 600
600/1000/1500	100/200/200	1250 x 1250	1250 x 455	600 to 1500
600/1000/1500	100/200/200	1500 x 1500	1500 x 455	600 to 1500

Technical specifications

Weighing units	g, kg, litre, carat (selectable)
Calendar / clock	Date / time available through in-built RTC
Weight recording	Automatic or manual
Printing data	Bill print (for each transaction) & List print (summary reports)
Memory	4 MB Flash 25,000 transaction records, (optionally expandable upto 8 MB)
Display type	Graphic LCD
Standard options	2 x RS-232 serial
	2 x USB host for keyboard & barcode scanner or Pen drive, 1 x USB device
	3 x Potential free set point relay output (12 V / 1.5A)
Optional interfaces	Flame Proof Enclosure (FLP)
	1 x Ethernet - TCP/IP (10/100 Mbps auto negotiation)
	Wi-Fi (Range up to 20 m line of sight)
	Digital 4-20 mA
	GPS Receiver
Others	21-CFR Software
	External scale / balance interface through RS-232, only for selected Essae models
Accessories	TM-U220D Dot Matrix Printer (Serial)
	25 / 50 mm JUMBO DISPLAY
	MS ROLLER 450 x 550 / 550 X 650 / 700 x 800 mm
	DP-810 Printer
	2 / 3 Color Towerlamp Kit
	EQDF file
Table mount kit	

Sample List Print format 1 :

Essae-Teraoka Pvt Ltd Bangalore								
Sl.No	Product Name	Date	Time	Tare Wt	Net Wt	Gross Wt	Quantity	Remark
1	M3X6 shim screw	19-09-2009	13:43	0.250	0.241	0.491	10	LOW
2	M3X8 shim screw	19-09-2009	13:44	0.000	1.476	1.476	6033	HIGH
3	M3 hex nut	19-09-2009	13:44	0.100	1.380	1.480	3115	HIGH
4	M4 spring washer	19-09-2009	13:45	0.500	0.483	0.983	9662	HIGH
5	M6 rubber leg	19-09-2009	13:46	0.987	0.494	1.481	1501	HIGH
6	M8 hex nut	19-09-2009	13:46	0.250	1.234	1.484	4001	HIGH
				2.087	5.308	7.395	24322	

Thank you

Sample Bill Print format 1 :

Essae Teraoka Pvt Ltd Bangalore	
Sl.No	: 1
Product Name	: M3X6 shim screw
Date	: 19-09-2009
Time	: 13:43
Tare Wt	: 0.250 kg
Net Wt	: 0.241 kg
Gross Wt	: 0.491 kg
Quantity	: 10 pcs
Remark	: LOW

Thank you



SI-850 FLP Indicator



Tower Lamp

Sample List Print format 2 :

CADILLA HEALTH CARE Zydus Towers, Satellite Cross Road Ahmedabad		
Date	: 17-03-2010	
Product Name	: Influenzum 2005	
Batch No	: 1235	
OP.Name	: Sriram	
Sample Size	: 993	
Min	: 0.100	Max : 0.200
SI.NO	NET WT	Remarks
132	0.253	HIGH
133	0.254	HIGH
134	0.258	HIGH
135	0.259	HIGH
136	0.153	OK
137	0.098	LOW
Total	: 1.275	
Avg Net Wt	: 0.253	
Lowest Wt	: 0.098	
Highest wt	: 0.259	
Std Dev	: 0.069	
Variance	: 0.004	
Rel.Deviation	: 0.327	
No.Of Low	: 1	
No Of OK	: 1	
No Of High	: 4	